

IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

TECHNICAL SPECIFICATIONS



Model:

IL3-029

Stand-by automatic gen set.

Image for guidance purposes.

ENGINE	MAKE	MODEL
	LOMBARDINI	LDW 1603

ALTERNATOR	MODEL
	MECC-ALTE ECP-28 2L

(400 / 230 V)

CONTINUOUS POWER:
(PRP "Prime Power" norma ISO 8528-1) **26 kVA**

STAND-BY POWER:
(LTP "Limited Time Power" norma ISO 8528-1) **29 kVA**

Amperes in the different voltages:

VOLTAGE	HZ	PHASE	COS Ø	PRP KVA/KW	LTP KVA/KW	AMPERAGE
415/240	50	3	0,8	26,2/21,0	28,8/23,1	40,16
400/230	50	3	0,8	26,2/21,0	28,8/23,1	41,67
380/220	50	3	0,8	26,2/21,0	28,8/23,1	43,86
240/139	50	3	0,8	26,2/21,0	28,8/23,1	69,45
230/133	50	3	0,8	26,2/21,0	28,8/23,1	72,47
220/127	50	3	0,8	26,2/21,0	28,8/23,1	75,76

ELECTRO EXIM SRL

ELECTRO EXIM SRL
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201
E-mail: office@electroexim.com - Web: www.electroexim.ro

IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

ENGINE CHARACTERISTICS

MAKE	MODEL
LOMBARDINI	LDW 1603

GENERAL DATA

Power PRP (kWm)	24.30
Power LTP (kWm)	26.70
No. cylinders	3
Cylinder capacity (L)	1.60
Diameter per stroke (mm)	88 x 90,4
Compression ratio	22.00
Cooling system	LIQUID
Injection	INDIRECT
Suction	NATURAL
Series regulator	MECHANICAL
Fly wheel coupling	-

Lubrication system

Oil capacity (L)	3.80
Oil consumption (%)	0.28
Min. alarm oil pressure (bar)	-

Ventilation system

Air cooling flow (m3/h)	5760
Combustion air flow (m3/h)	148.50
Max. back pressure for fan (mbar)	-

Exhaust system

Exhaust gas flow (m3/h)	-
Exhaust back pressure (mbar)	-
Temp. exhaust gases (°C)	-

Electrical system

VDC (V)	12
Battery (Ah)	60
Engine start-up (kW)	-

ELECTRO EXIM SRL

ELECTRO EXIM SRL
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201
E-mail: office@electroexim.com - Web: www.electroexim.ro

IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

ALTERNATOR CHARACTERISTICS

MODEL

MECC-ALTE ECP-28 2L

(400 / 230 V)

GENERAL DATA

Power PRP (kVA)	27.00
Power LTP (kVA)	29.70
Efficiency Alt. 3/4 %	87.00
Efficiency Alt. 4/4 %	86.40
No. Poles	2
Voltage regulator	DSR
No. wires	12
Insulation	H
Xd (%)	224.20
X'd (%)	7.60
X	4.30
Degree of protection	IP23

GENERATOR SET CONSUMPTION

% POWER USED	LITRES/HOUR
50%	4.00
75%	6.00
100%	8.00

DIMENSIONS, CAPACITIES, APPROXIMATE WEIGHT AND NOISE

LENGTH	DIMENSIONS (MM)	
	WIDTH	HEIGHT
1600	900	1132
FUEL TANK (LITRES)		WEIGHT (KG)
47.00		655.00
NOISE LEVEL (dB (A))		
61 dB (A) @ 7 m		

ELECTRO EXIM SRL

ELECTRO EXIM SRL
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201
E-mail: office@electroexim.com - Web: www.electroexim.ro

IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

INMESOL GENERATOR SET

GENERAL DESCRIPTION

The "INMESOL" generator set is an electrical energy generating machine which is used in places where there **is no mains supply** or when there is a MAINS failure.

The mobile elements, distribution belt, fan, etc., and those parts which reach high temperatures during operation, exhaust manifold, etc, include their corresponding protections, in compliance with the requirements of the Machinery Directive **2006/42**.

REGULATIONS

The machine holds the "CE" marking, and the corresponding Declaration of Conformity is issued with each of them, in which it specifies that the machine complies with **R.D 842/2002 Low Voltage Regulations and with the European Directives:**

- 2006/42 on Safety in Machinery.
- 2006/95/CE on Electrical Safety.
- 2004/108/CE on Electromagnetic Compatibility.
- 2005/88/CE on NOISE EMISSIONS by equipment for outdoor use (for SOUNDPROOF GENERATOR SETS).

ELECTRO EXIM SRL

ELECTRO EXIM SRL
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201
E-mail: office@electroexim.com - Web: www.electroexim.ro

IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

SB STAND-BY RANGE / SCOPE OF SUPPLY

		
Engine/alternator monobloc directly connected and installed via silent blocks on a frame made from high tensile electro welded steel profiles that are treated with degreasing liquids and applied with a phosphate coat and epoxy paint.	☒	☒
Canopy of steel sheet sound proofed with fireproof rockwool, and treated with degreasing liquids and applied with a phosphate coat and epoxy paint.	☐	☒
Fuel tank integrated in the chassis provided with fuel level gauge and fuel lines to the engine.	☒	☒
Engine with mechanical engine driven pusher fan.	☒	☒
Industrial silencer with -15 db(A) noise reduction and exhaust outlet tube.	☒	☐
Residential silencer with -35 db(a) noise reduction with exhaust tube and protection cap.	☐	☒
4 Pole thermal and magnetic circuit breaker.	☒	☒
Battery charge alternator.	☒	☒
Starter battery complete with cables to the engine and pole protection.	☒	☒
Installation prepared for earthing spike (spike not included).	☒	☒
Security protection for belts and moving parts as well as on electrical component.	☒	☒
External emergency stop push button.	☒	☒
Manual engine oil extraction pump.	☐	☒
Self excited and auto regulated alternator.	☒	☒
Integrated lifting hook for single point lifting with crane, gensets up to 450 kVA (Except in swing-out cover model)	☐	☒
4 Lifting points for gen sets from 450 kVA and bigger.	☒	☐
Prepared for extended fuel tank, fully bonded for leakage protection.	☒	☒
Base frame prepared for trailer kit	☒	☒
Standard electronic speed governor on engines from 220 kVA and up.	☒	☒
Electric control cubicle with digital control module, automatic mains failure, manual start or remote start on signal.	☒	☒
Battery charger for gen set with 12VCC battery (2A).	☒	☒
Battery charger for gen set with 24VCC battery (5A).	☒	☒
Electric engine coolant preheating on gen sets with automatic mains failure controller.	☒	☒
Horizontal outlet for hot air	☐	☒

ELECTRO EXIM SRL

ELECTRO EXIM SRL
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201
E-mail: office@electroexim.com - Web: www.electroexim.ro


IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

DSE 6020 MKII AUTOMATIC CONTROL PANEL

DSE 6020 MKII AUTOMATIC CONTROL PANEL

PROTECTION, DISTRIBUTION AND AUTOMATIC CONTROL panel which starts the generator set when it detects a mains failure and stops it when the mains is restored with the control unit DSE 6020 MKII. It also starts and stops the group manually via a pushbutton or remote start-up by contact

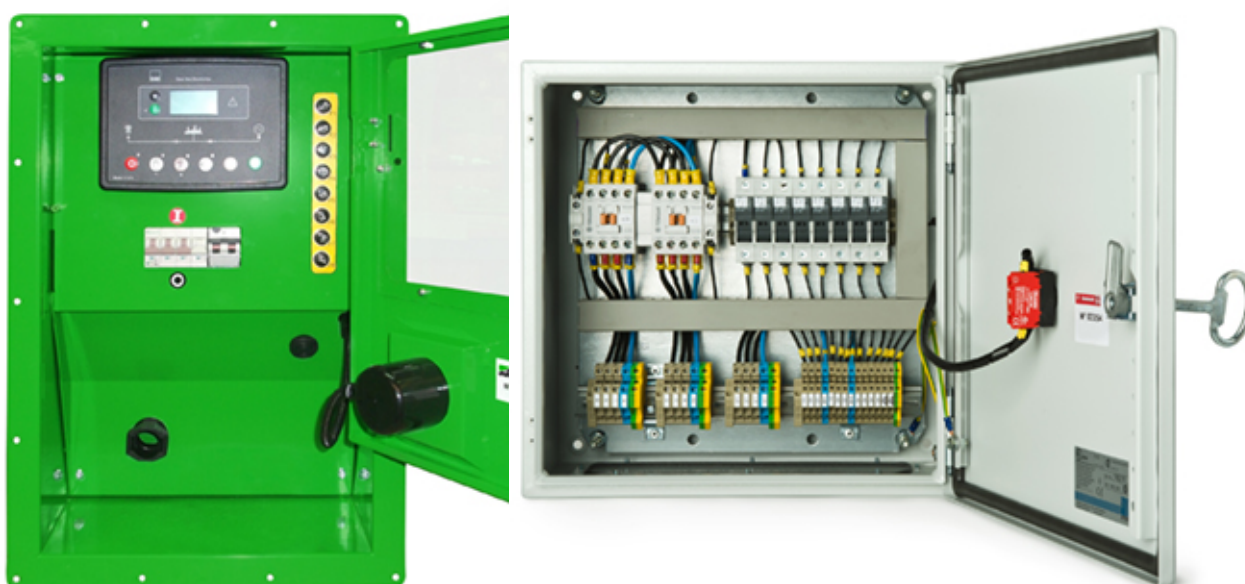

Imágenes orientativas.

It has the following:

- 1** EMERGENCY STOP PUSHBUTTON
- 2** PROTECTIONS:
 - Magnetothermal switch (preheating resist.) 2P (16 A)
 - Protection fuses for control module
- 3** BATTERY CHARGER

IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

DSE 6020 MKII AUTOMATIC CONTROL PANEL

- 4 DSE 6020 MKII PROTECCION CONTROL MODULE.** It has a digital LCD screen, which provides easy reading of the information regarding the ENGINE, ALTERNATOR, MAINS and CHARGING.

READINGS that can be made::

ENGINE:

- Coolant temperature
- Oil pressure
- Turning speed (rpm)
- Fuel level
- Battery voltage
- Battery alternator voltage.
- Operating hours
- Number of start-ups

ALTERNATOR AND CHARGE:

- Voltages between phases and between phases and neutral.
- Intensities
- Frequency
- Active Power (kW)
- Reactive Power (kVAr)
- Apparent Power (kVA)
- Cos phi
- Active energy meter (kW-h)

MAINS:

- Frequency
- Voltages between phases and neutral (L1-N, L2-N, L3-N).
- Voltages between phases and (L1-L2, L2-L3, L1-L3).
- Reactive Power (kVAr)
- Apparent Power (kVA)
- Cos phi

CONTROL of the set:

- STARTS and STOPS the set AUTOMATICALLY when mains failure is detected and when it is restored, respectively.
- It can also operate MANUALLY a REMOTE START
- Breaker control via fascia buttons

Protection of the engine and alternator, with the ALARMS activated:

ENGINE:

- Low oil pressure
- High coolant temperature
- Low and High battery Voltage.
- Failure of the alternator to charge batteries
- Low fuel level
- Engine maintenance alarms for fuel filter, air filter and oil filter

IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

DSE 6020 MKII AUTOMATIC CONTROL PANEL

ALTERNATOR:

- Low and High Voltage
- Low and High Frequency
- Overload due to Intensity (A)
- Power Overload (KW)

MAINS:

- Low and High Voltage
- Low and High Frequency

OTHER CHARACTERISTICS:

- The real-time clock provides an exact record of events.
- Extensive number of configurable inputs and outputs.
- Configurable alarms and timers.
- USB connectivity
- Fully configurable via software and PC.
- Communication via USB cable for remote control
- Programmable clock with multiple maintenance events which can be configured for optimal motor functioning. Weekly and/or monthly programming for up to 8 startups and shutdowns per week.
- ALTERNATIVE CONFIGURATIONS, which open up the working possibilities

5 DISTRIBUTION:

- Direct output of the magnetothermal switch.

6 OPTIONAL:

- 4-Pole Switchboard installed next to the controller in the same metal cabinet.
- 4-Pole Switchboard in metal cabinet independent from the Automatic Panel





IL3-029 - LOMBARDINI - LDW 1603 (3000 rpm)

3.000 R.P.M. | 50 Hz

DSE 6020 MKII AUTOMATIC CONTROL PANEL


The following table shows the different amperages of the magnetothermal switches and the switchboards according to the set's power - Three-phase generators (single phase by request):

CONT. POW.		CONTINUOUS POWER MAGNETOTHERMAL PROTECTION IV POLES (A)	SWITCHBOARD IV POLES (A)
SET'S POWER	10 kVA	16	25
	15 kVA	25	25
	20 kVA	32	30
	30 kVA	50	45
	40 kVA	63	60
	50 kVA	80	100
	60 kVA	100	100
	75 kVA	125	125
	80 kVA	125	125
	100 kVA	160	160
	125 kVA	250	260
	150 kVA	250	260
	160 kVA	250	260
	170 kVA	250	260
	200 kVA	400	400

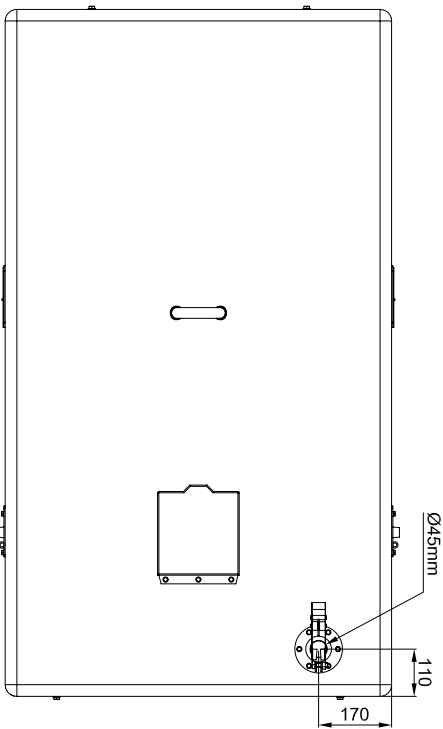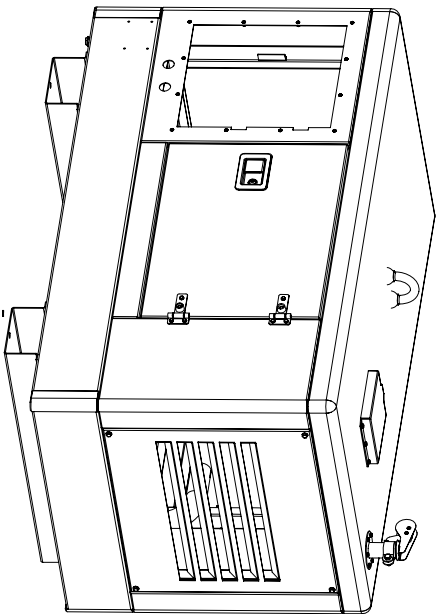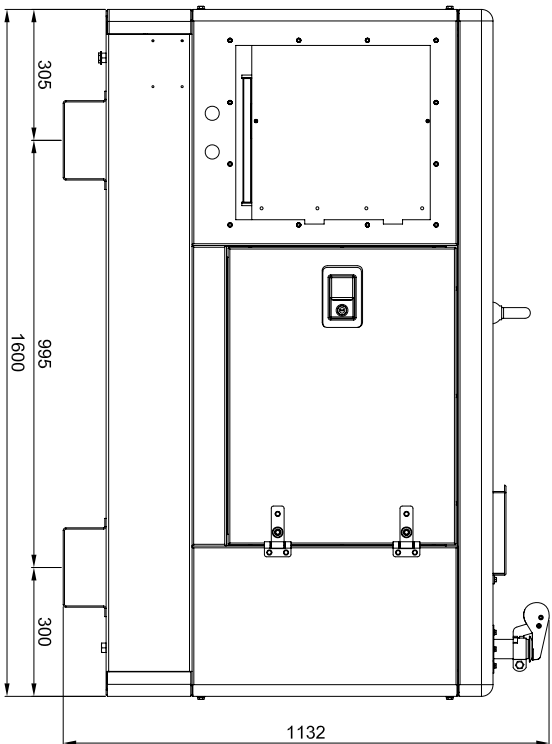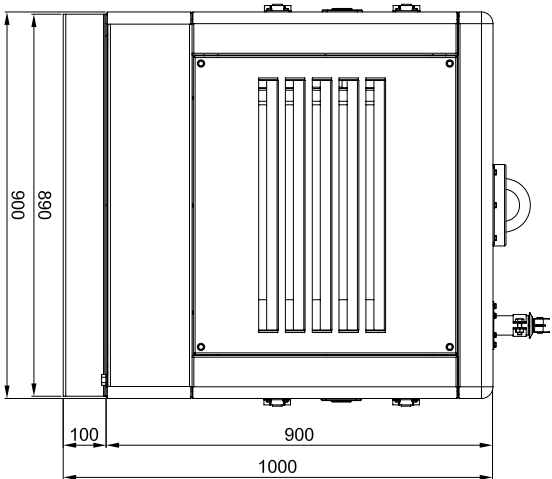

CAPACIDAD DE DEPOSITO = 47 LTS

				PROYECTO:			
Las tolerancias o surtos de capacidad de carga, o de peso, o de volumen, o de cualquier otro tipo, no serán responsabilidad de INMIESOL, sino de los clientes, quienes deberán verificarlos antes de aceptar el producto, ya que el mismo se entregará tal como se encuentra en el momento de la entrega, sin garantía de capacidad de carga, peso, volumen, o de cualquier otro tipo.				G.E. INSOORO 10-15 Kva R12 CHASIS BAJO			
MODIFICADO				MATERIAL			
DISEÑADO				TOLERANCIA GENERAL			
COMPROBADO				mm			
CODIGO				EXPEDIENTE:			
PESO				Nº PLANO			
ESCALA				MARCA			

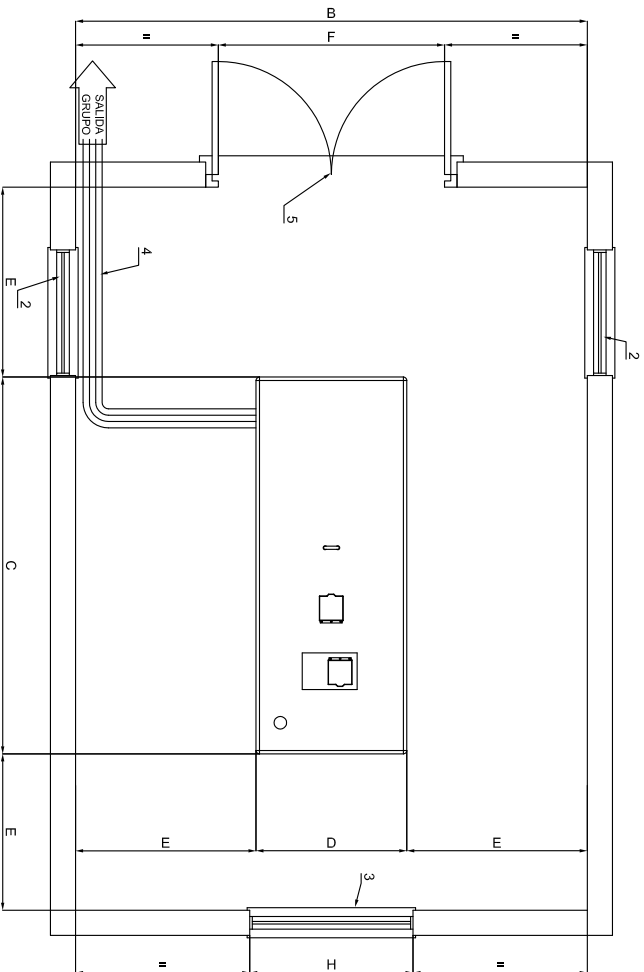

NOMENCLATURA
1.- GRUPO ELECTROGENO
2.- HUECO ENTRADA DEL AIRE
3.- TUNEL EXPULSION DEL AIRE
4.- BANDEJA PASCABLES
5.- PUERTA DE ACCESO
6.- BASE HORMIGON ARMADO H-175
7.- TUBO DE ESCAPE

EL Ø DE LA TUBERÍA DE EXTENSION DEL ESCAPE PUEDE SER EL MISMO QUE EL DEL SIENCAJOR HASTA 5 m. PARA DISTANCIAS MAYORES DE 5 m, DEBE AUMENTARSE EL Ø DE LA TUBERÍA 10 mm POR CADA 10 m MAS DE DISTANCIA ENTRE EL GRUPO ELECTROGENO Y LA SALIDA EXTERIOR

		Los datos expresados en el presente documento son de carácter informativo y no constituyen una oferta de inversión. Toda inversión conlleva riesgos, los cuales serán detallados en el prospecto de inversión. No se garantiza el cumplimiento de los plazos expresados en el presente documento. Los datos expresados en el presente documento son de carácter informativo y no constituyen una oferta de inversión. Toda inversión conlleva riesgos, los cuales serán detallados en el prospecto de inversión. No se garantiza el cumplimiento de los plazos expresados en el presente documento.	
PROYECTO:		GRUPO INSONORIZADO	
MODIFICADO:		A/AQUILAR 02-ene-2015	
DEBILUADO:		J/SEBILAR 27-feb-2006	
CONPROBADO:		J/SEBILAR 04-oct-2012	
DEMONIACIÓ:		MATERIAL TOLERANCIA GENERAL	
GRUPO INSONORIZADO		UDS:	
DIMENSIONES DE SALA		EXPEDIENTE:	
ORDEN		Nº MOD.	
ESCALA		Nº PLANO	
ESCALA		MARCA	