

**IV-440 - VOLVO - TAD 1344 GE**

**1.500 R.P.M. | 50 Hz**

## TECHNICAL SPECIFICATIONS

Model:

**IV-440**

Stand-by automatic gen set.



Image for guidance purposes.

| ENGINE     | MAKE                 | MODEL       |
|------------|----------------------|-------------|
|            | VOLVO                | TAD 1344 GE |
| ALTERNATOR | MODEL                |             |
|            | MECC-ALTE ECO 40-1SN |             |

(400 / 230 V)

CONTINUOUS POWER:  
(PRP "Prime Power" norma ISO 8528-1) **400 kVA**

STAND-BY POWER:  
(LTP "Limited Time Power" norma ISO 8528-1) **440 kVA**

### Amperes in the different voltages:

| VOLTAGE | HZ | PHASE | COS Ø | PRP KVA/KW  | LTP KVA/KW  | AMPERAGE |
|---------|----|-------|-------|-------------|-------------|----------|
| 415/240 | 50 | 3     | 0,8   | 400,0/320,0 | 440,0/352,0 | 612,86   |
| 400/230 | 50 | 3     | 0,8   | 400,0/320,0 | 440,0/352,0 | 635,84   |
| 380/220 | 50 | 3     | 0,8   | 400,0/320,0 | 440,0/352,0 | 669,3    |
| 240/139 | 50 | 3     | 0,8   | 400,0/320,0 | 440,0/352,0 | 1059,73  |
| 230/133 | 50 | 3     | 0,8   | 400,0/320,0 | 440,0/352,0 | 1105,81  |
| 220/127 | 50 | 3     | 0,8   | 400,0/320,0 | 440,0/352,0 | 1156,07  |

**ELECTRO EXIM SRL**

**ELECTRO EXIM SRL**  
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA  
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201  
E-mail: office@electroexim.com - Web: www.electroexim.ro

**IV-440 - VOLVO - TAD 1344 GE**

**1.500 R.P.M. | 50 Hz**

## ENGINE CHARACTERISTICS

| MAKE  | MODEL       |
|-------|-------------|
| VOLVO | TAD 1344 GE |

### GENERAL DATA

|                          |               |
|--------------------------|---------------|
| Power PRP (kWm)          | 354           |
| Power LTP (kWm)          | 389           |
| No. cylinders            | 6             |
| Cylinder capacity (L)    | 12.78         |
| Diameter per stroke (mm) | 131 x 158     |
| Compression ratio        | -             |
| Cooling system           | LIQUID        |
| Injection                | COMMON RAIL   |
| Suction                  | TURBO-INTERC. |
| Series regulator         | ELECTRONIC    |
| Fly wheel coupling       | 1 - 14"       |

### Lubrication system

|                               |      |
|-------------------------------|------|
| Oil capacity (L)              | 36   |
| Oil consumption (%)           | 0.05 |
| Min. alarm oil pressure (bar) | 2.20 |

### Ventilation system

|                                   |       |
|-----------------------------------|-------|
| Air cooling flow (m3/h)           | 23400 |
| Combustion air flow (m3/h)        | 1476  |
| Max. back pressure for fan (mbar) | 0     |

### Exhaust system

|                              |      |
|------------------------------|------|
| Exhaust gas flow (m3/h)      | 3810 |
| Exhaust back pressure (mbar) | 100  |
| Temp. exhaust gases (°C)     | 440  |

### Electrical system

|                      |         |
|----------------------|---------|
| VDC (V)              | 24      |
| Battery (Ah)         | 2 x 180 |
| Engine start-up (kW) | 7       |

**ELECTRO EXIM SRL**

**ELECTRO EXIM SRL**  
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA  
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201  
E-mail: office@electroexim.com - Web: www.electroexim.ro

**IV-440 - VOLVO - TAD 1344 GE**

**1.500 R.P.M. | 50 Hz**

## ALTERNATOR CHARACTERISTICS

### MODEL

MECC-ALTE ECO 40-1SN (400 / 230 V)

### GENERAL DATA

|                       |        |
|-----------------------|--------|
| Power PRP (kVA)       | 400    |
| Power LTP (kVA)       | 440.00 |
| Efficiency Alt. 3/4 % | 94.40  |
| Efficiency Alt. 4/4 % | 94.20  |
| No. Poles             | 4      |
| Voltage regulator     | DER-1  |
| No. wires             | 12     |
| Insulation            | H      |
| Xd (%)                | 277.00 |
| X'd (%)               | 22.50  |
| X                     | 14.20  |
| Degree of protection  | IP21   |

## GENERATOR SET CONSUMPTION

| % POWER USED | LITRES/HOUR |
|--------------|-------------|
| 50%          | 43          |
| 75%          | 63          |
| 100%         | 83          |

## DIMENSIONS, CAPACITIES, APPROXIMATE WEIGHT AND NOISE

| LENGTH               | DIMENSIONS (MM) |             |
|----------------------|-----------------|-------------|
|                      | WIDTH           | HEIGHT      |
| 4200                 | 1600            | 2145        |
| FUEL TANK (LITRES)   |                 | WEIGHT (KG) |
| 534.00               |                 | 4600.00     |
| NOISE LEVEL (dB (A)) |                 |             |
| 72 @ 7 m             |                 |             |

**ELECTRO EXIM SRL**

**ELECTRO EXIM SRL**  
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA  
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201  
E-mail: office@electroexim.com - Web: www.electroexim.ro

IV-440 - VOLVO - TAD 1344 GE

1.500 R.P.M. | 50 Hz

## INMESOL GENERATOR SET

### GENERAL DESCRIPTION

The "INMESOL" generator set is an electrical energy generating machine which is used in places where there **is no mains supply** or when there is a MAINS failure.

The mobile elements, distribution belt, fan, etc., and those parts which reach high temperatures during operation, exhaust manifold, etc, include their corresponding protections, in compliance with the requirements of the Machinery Directive **2006/42**.

### REGULATIONS

The machine holds the "CE" marking, and the corresponding Declaration of Conformity is issued with each of them, in which it specifies that the machine complies with **R.D 842/2002 Low Voltage Regulations and with the European Directives:**

- 2006/42 on Safety in Machinery.
- 2006/95/CE on Electrical Safety.
- 2004/108/CE on Electromagnetic Compatibility.
- 2005/88/CE on NOISE EMISSIONS by equipment for outdoor use (for SOUNDPROOF GENERATOR SETS).

**ELECTRO EXIM SRL**

ELECTRO EXIM SRL  
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA  
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201  
E-mail: [office@electroexim.com](mailto:office@electroexim.com) - Web: [www.electroexim.ro](http://www.electroexim.ro)

IV-440 - VOLVO - TAD 1344 GE

1.500 R.P.M. | 50 Hz

## SB STAND-BY RANGE / SCOPE OF SUPPLY

|                                                                                                                                                                                                                                           |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Engine/alternator monobloc directly connected and installed via silent blocks on a frame made from high tensile electro welded steel profiles that are treated with degreasing liquids and applied with a phosphate coat and epoxy paint. | ✓                                                                                   | ✓                                                                                   |
| Canopy of steel sheet sound proofed with fireproof rockwool, and treated with degreasing liquids and applied with a phosphate coat and epoxy paint.                                                                                       | •                                                                                   | ✓                                                                                   |
| Fuel tank integrated in the chassis provided with fuel level gauge and fuel lines to the engine.                                                                                                                                          | ✓                                                                                   | ✓                                                                                   |
| Engine with mechanical engine driven pusher fan.                                                                                                                                                                                          | ✓                                                                                   | ✓                                                                                   |
| Industrial silencer with -15 db(A) noise reduction and exhaust outlet tube.                                                                                                                                                               | ✓                                                                                   | •                                                                                   |
| Residential silencer with -35 db(a) noise reduction with exhaust tube and protection cap.                                                                                                                                                 | •                                                                                   | ✓                                                                                   |
| 4 Pole thermal and magnetic circuit breaker.                                                                                                                                                                                              | ✓                                                                                   | ✓                                                                                   |
| Battery charge alternator.                                                                                                                                                                                                                | ✓                                                                                   | ✓                                                                                   |
| Starter battery complete with cables to the engine and pole protection.                                                                                                                                                                   | ✓                                                                                   | ✓                                                                                   |
| Installation prepared for earthing spike (spike not included).                                                                                                                                                                            | ✓                                                                                   | ✓                                                                                   |
| Security protection for belts and moving parts as well as on electrical component.                                                                                                                                                        | ✓                                                                                   | ✓                                                                                   |
| External emergency stop push button.                                                                                                                                                                                                      | ✓                                                                                   | ✓                                                                                   |
| Manual engine oil extraction pump.                                                                                                                                                                                                        | •                                                                                   | ✓                                                                                   |
| Self excited and auto regulated alternator.                                                                                                                                                                                               | ✓                                                                                   | ✓                                                                                   |
| Integrated lifting hook for single point lifting with crane, gensets up to 450 kVA (Except in swing-out cover model)                                                                                                                      | •                                                                                   | ✓                                                                                   |
| 4 Lifting points for gen sets from 450 kVA and bigger.                                                                                                                                                                                    | ✓                                                                                   | •                                                                                   |
| Prepared for extended fuel tank, fully bonded for leakage protection.                                                                                                                                                                     | ✓                                                                                   | ✓                                                                                   |
| Base frame prepared for trailer kit                                                                                                                                                                                                       | ✓                                                                                   | ✓                                                                                   |
| Standard electronic speed governor on engines from 220 kVA and up.                                                                                                                                                                        | ✓                                                                                   | ✓                                                                                   |
| Electric control cubicle with digital control module, automatic mains failure, manual start or remote start on signal.                                                                                                                    | ✓                                                                                   | ✓                                                                                   |
| Battery charger for gen set with 12VCC battery (2A).                                                                                                                                                                                      | ✓                                                                                   | ✓                                                                                   |
| Battery charger for gen set with 24VCC battery (5A).                                                                                                                                                                                      | ✓                                                                                   | ✓                                                                                   |
| Electric engine coolant preheating on gen sets with automatic mains failure controller.                                                                                                                                                   | ✓                                                                                   | ✓                                                                                   |
| Horizontal outlet for hot air                                                                                                                                                                                                             | •                                                                                   | ✓                                                                                   |

**ELECTRO EXIM SRL**

**ELECTRO EXIM SRL**  
21 Ialomicioarei St., sector 1, code 011277, BUCHAREST - ROMANIA  
Phone: 0040 21 2231347 - 0040 744 755 390 - FAX: 0040 21 2231201  
E-mail: office@electroexim.com - Web: www.electroexim.ro

IV-440 - VOLVO - TAD 1344 GE

1.500 R.P.M. | 50 Hz

## DSE 7320 AUTOMATIC CONTROL PANEL

### DSE 7320 AUTOMATIC CONTROL PANEL

PROTECTION, DISTRIBUTION AND AUTOMATIC CONTROL panel which starts the generator set when it detects a mains failure and stops it when the mains is restored with the control unit DSE 7320.



Image for guidance purposes.

It has the following:

- 1** EMERGENCY STOP PUSHBUTTON
- 2** PROTECTIONS:
  - Magnetothermal switch (preheating resist.) 2P (16 A)
  - Protection fuses for control module
- 3** BATTERY CHARGER

IV-440 - VOLVO - TAD 1344 GE

1.500 R.P.M. | 50 Hz

## DSE 7320 AUTOMATIC CONTROL PANEL

- 4 DSE 7320 CONTROL and PROTECTION CENTRE.** It has a digital LCD screen, which provides easy reading of the information regarding the ENGINE, ALTERNATOR, MAINS and CHARGING.

### READINGS that can be made:

#### ENGINE:

- Coolant temperature
- Oil pressure
- Turning speed (rpm)
- Fuel level
- Battery voltage
- Battery alternator voltage.
- Operating hours
- Number of start-ups

#### ALTERNATOR AND CHARGE:

- Voltages between phases and between phases and neutral.
- Intensities
- Frequency
- Active Power (kW)
- Reactive Power (kVAr)
- Apparent Power (kVA)
- Cos phi
- Active energy meter (kW-h)

#### MAINS:

- Frequency
- Phase rotation order
- Voltages between phases and neutral (L1-N, L2-N, L3-N).
- Voltages between phases and (L1-L2, L2-L3, L1-L3).
- Earth current

### CONTROL of the set:

- STARTS and STOPS the set AUTOMATICALLY when mains failure is detected and when it is restored, respectively.
- It can also operate MANUALLY

### Protection of the engine and alternator, with the ALARMS activated:

#### ENGINE:

- Low oil pressure
- High coolant temperature
- Low and High battery Voltage.
- Failure of the alternator to charge batteries
- Low fuel level

IV-440 - VOLVO - TAD 1344 GE

1.500 R.P.M. | 50 Hz

## DSE 7320 AUTOMATIC CONTROL PANEL

### ALTERNATOR:

- Low and High Voltage
- Low and High Frequency
- Overload due to Intensity (A)
- Short-circuit
- Negative Phase Sequence.
- Power Overload (KW-kVA)
- Load control:
  - 1.Connection and disconnection of artificial loads.
  - 2.Disconnection of non-essential loads

### MAINS:

- Low and High Voltage
- Low and High Frequency

### OTHER CHARACTERISTICS:

- The real-time clock provides an exact record of events.
- Extensive number of configurable inputs and outputs.
- Configurable alarms and timers.
- USB connectivity
- Fully configurable via software and PC.
- Modbus RTU
- Possibility of SMS text messages
- Communications Ethernet, RS 232 and RS 485
- Programmer Clock with multiple maintenance events which can be configured for the optimal operation of the engine. Weekly and/or monthly programming of up to 16 starts and stops per week.
- ALTERNATIVE CONFIGURATIONS, which open up the working possibilities

## 5 DISTRIBUTION:

- Direct output of the magnetothermal switch.

## 6 OPTIONAL:

- 4-Pole Switchboard installed next to the Automatic Panel
- 4-Pole Switchboard in metal cabinet independent from the Automatic Panel









IV-440 - VOLVO - TAD 1344 GE

1.500 R.P.M. | 50 Hz

## DSE 7320 AUTOMATIC CONTROL PANEL

The following table shows the different amperages of the magnetothermal switches and the switchboards according to the set's power - Three-phase generators (single phase by request):

| CONT. POW   |                 | MAGNETOTHERMAL PROTECTION IV POLES (A) | SWITCHBOARD IV POLES (A) |
|-------------|-----------------|----------------------------------------|--------------------------|
| SET'S POWER | 250 - 275 kVA   | 400                                    | 400                      |
|             | 300 - 430 kVA   | 630                                    | 630                      |
|             | 450 - 500 kVA   | 800                                    | 800                      |
|             | 570 - 650 kVA   | 1000                                   | 1250                     |
|             | 780 - 800 kVA   | 1250                                   | 1250                     |
|             | 915 - 1100 kVA  | 1600                                   | 1650                     |
|             | 1150 - 1300 kVA | 2000                                   | 2000                     |
|             | 1400 - 1750 kVA | 2500                                   | 2500                     |
|             | 1800 - 2100 kVA | 3200                                   | 3200                     |

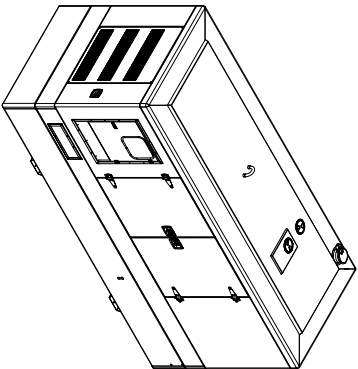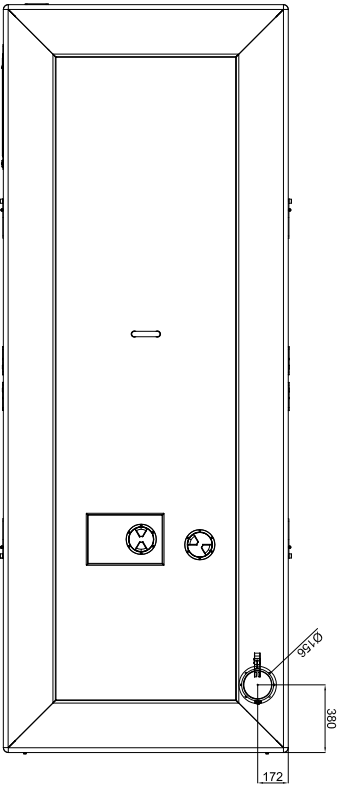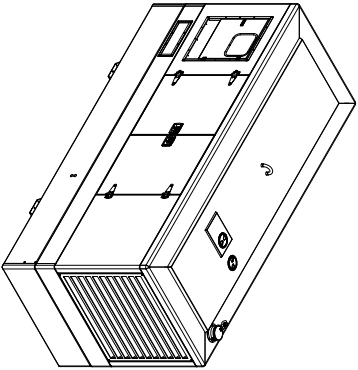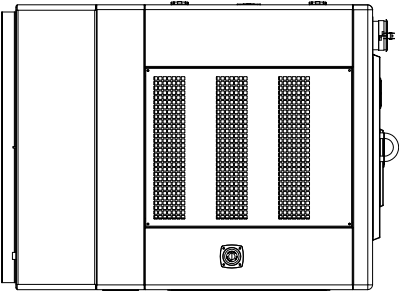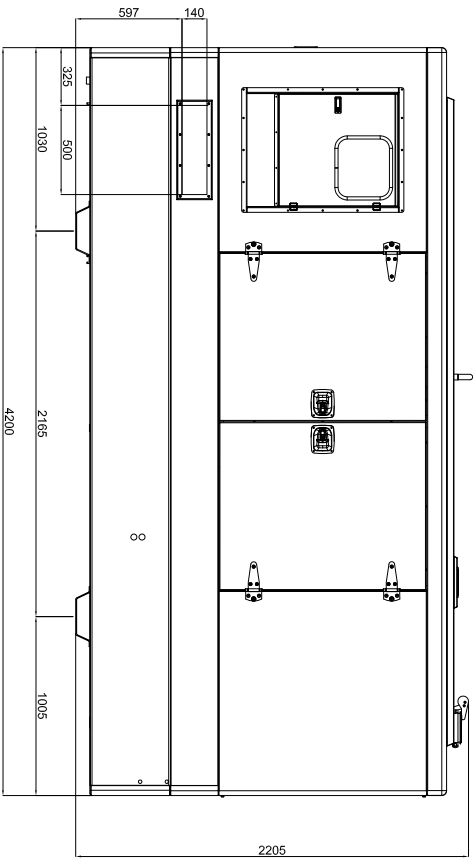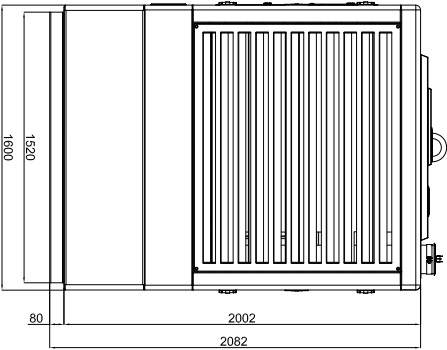


FUEL TANK CAPACITY = 534 LTS

GENSET MODEL BUILT INSIDE THIS CANOPY

|         | IL-330 | IL-385 | IL-440 | IL-550 |        |
|---------|--------|--------|--------|--------|--------|
| IVECO   | IL-330 | IL-385 | IL-440 | IL-550 |        |
| DEUTZ   | ID-330 | ID-415 |        |        |        |
| MTU     | IT-310 | IT-330 | IT-440 |        |        |
| VOLVO   | IV-330 | IV-385 | IV-415 | IV-440 | IV-500 |
| PERKINS | IP-300 | IP-330 | IP-385 | IP-440 |        |
| PERKINS | IP-355 | IP-450 | IP-520 | IP-580 |        |

|                                                                                                                                                                                                                                                                                                                                                   |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>INMESOL</b> POWER SOLUTIONS                                                                                                                                                                                                                                                                                                                    |  |
| ISO 9001:2015 CERTIFIED<br>We are a company specialized in the design and manufacture of fuel tank canopies for generators, with the aim of providing a complete solution to our customers. For this, we have a team of experts in the field of fuel tank canopies and generators, and a wide range of products to meet the needs of our clients. |  |
| CÓDIGO                                                                                                                                                                                                                                                                                                                                            |  |
| PESO                                                                                                                                                                                                                                                                                                                                              |  |
| ESCALA                                                                                                                                                                                                                                                                                                                                            |  |

|                                               |            |             |                    |    |  |
|-----------------------------------------------|------------|-------------|--------------------|----|--|
| PROYECTO:                                     |            |             |                    |    |  |
| SOUNDPROOFED CANOPY 4200x2220x1600 WATERTIGHT |            |             |                    |    |  |
| MODIFICADO                                    | A.AGUILAR  | 04/08/2015  | MATERIAL           |    |  |
| DISEÑADO                                      | J.L.BELAR  | 18-Jun-2012 | TOLERANCIA GENERAL |    |  |
| COMPROBADO                                    | J.L.SOLANO | 18-Jun-2012 | UDS                | mm |  |
| DENOMINACIÓN:                                 |            |             | EXPEDIENTE:        |    |  |
| SOUNDP. CANOPY 4200x2220x1600 300-400 Kva     |            |             | Nº MOD.            |    |  |
| GENERAL DIMENSIONS                            |            |             | Nº PLANO           |    |  |
|                                               |            |             | MARCA              |    |  |

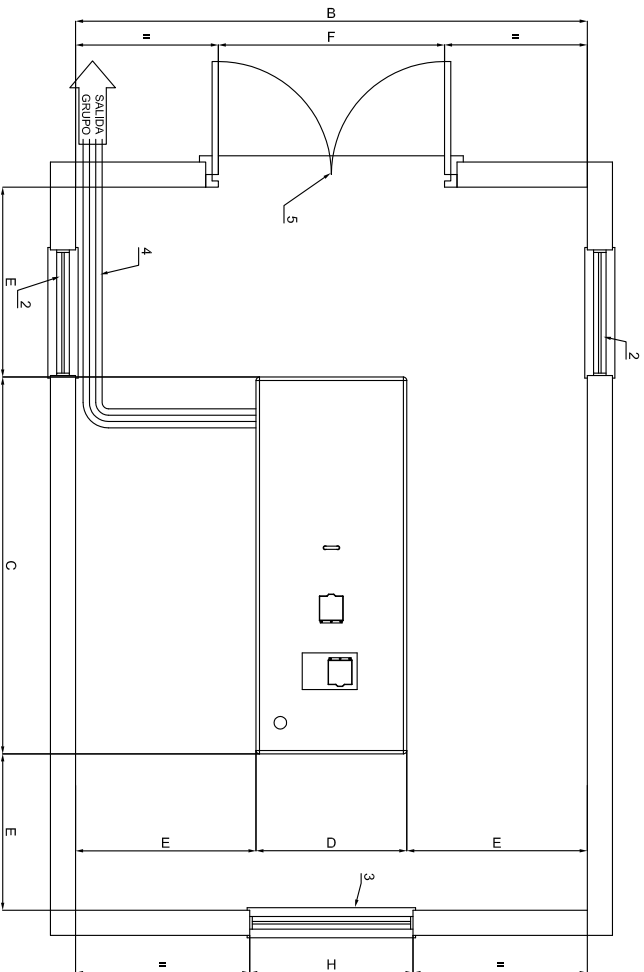

| NOMENCLATURA                   |
|--------------------------------|
| 1.- GRUPO ELECTROGENO          |
| 2.- HUECO ENTRADA DEL AIRE     |
| 3.- TUNEL EXPULSION DEL AIRE   |
| 4.- BANDEJA PASCABLES          |
| 5.- PUERTA DE ACCESO           |
| 6.- BASE HORMIGON ARMADO H-175 |
| 7.- TUBO DE ESCAPE             |

EL Ø DE LA TUBERÍA DE EXTENSION DEL ESCAPE PUEDE SER EL MISMO QUE EL DEL SIENCAJOR HASTA 5 m. PARA DISTANCIAS MAYORES DE 5 m, DEBE AUMENTARSE EL Ø DE LA TUBERÍA 10 mm POR CADA 10 m MAS DE DISTANCIA ENTRE EL GRUPO ELECTROGENO Y LA SALIDA EXTERIOR

|                                                                                     |                     |                                                                                                                                                                                                                                                                                                                                                                                        |                              |
|-------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
|  |                     | <p>Los datos expresados en el presente certificado de conformidad son válidos para el producto y el lote de fabricación especificados en el presente certificado de conformidad, siempre y cuando el fabricante mantenga las condiciones de fabricación y control de calidad que le permitieron obtener la certificación de conformidad en el presente certificado de conformidad.</p> |                              |
| PROYECTO:                                                                           | GRUPO INSONORIZADO  |                                                                                                                                                                                                                                                                                                                                                                                        |                              |
| MODIFICADO:                                                                         | A/AQUILAR           | 02-ene-2015                                                                                                                                                                                                                                                                                                                                                                            | MATERIAL                     |
| DEBILUADO:                                                                          | J.J.SEBAR           | 27-feb-2006                                                                                                                                                                                                                                                                                                                                                                            | TOLEANCIA GENERAL            |
| CONPROBADO:                                                                         | J.J.SOLANO          | 04-oct-2012                                                                                                                                                                                                                                                                                                                                                                            | UDS.                         |
| DEMONSTRACION:                                                                      | EXPEDIENTE:         |                                                                                                                                                                                                                                                                                                                                                                                        |                              |
| ORDEN:                                                                              | GRUPO INSONORIZADO  |                                                                                                                                                                                                                                                                                                                                                                                        |                              |
| ESCALA:                                                                             | DIMENSIONES DE SALA |                                                                                                                                                                                                                                                                                                                                                                                        |                              |
|                                                                                     |                     |                                                                                                                                                                                                                                                                                                                                                                                        | Nº MOD.<br>Nº PLANO<br>MARCA |